
EBECO SSS

heating solutions

ebeco.com

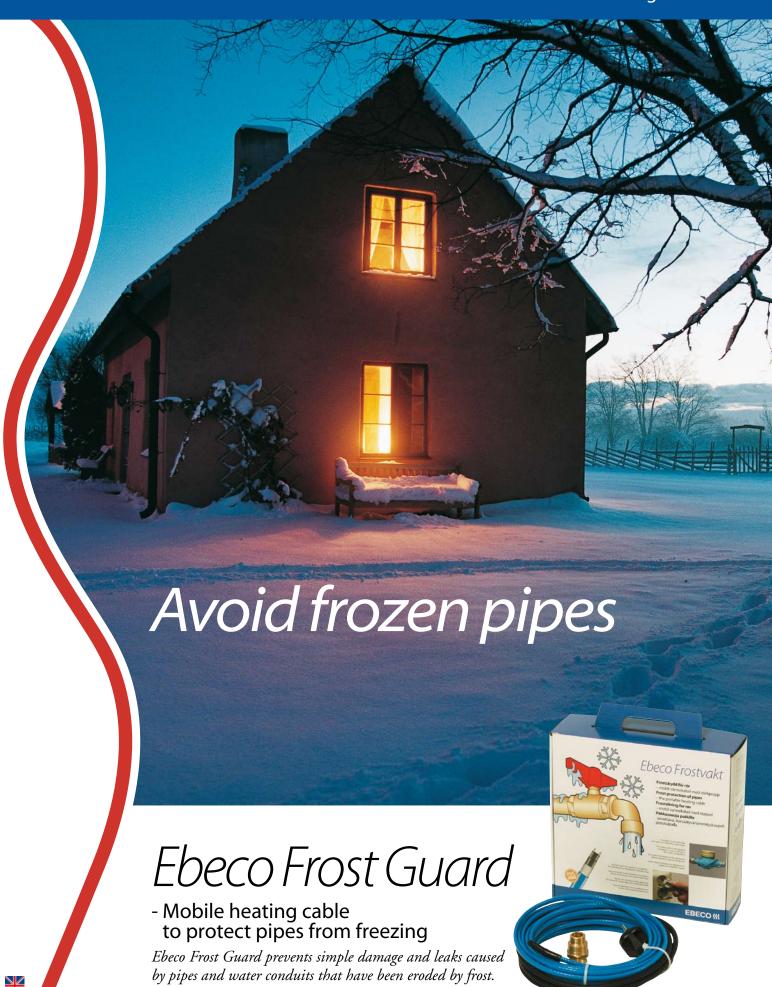

EBECO \\\

heating solutions



Mobile

Frost Guard is a mobile heating cable with a fitted attachment plug that is simple to connect to an earthed power point. Common areas of application are gutters, sewage pipes, water pipes and water meters in locations such as weekend cottages, garages, greenhouses or caravans.

Self-regulating

As the heating cable is self-regulating it can not be overheated. Not even if it is laid cross-ways for a perfect fit with the pipe. The cable regulates its own output according to the surrounding temperature. Thermostatic control is recommended for longer cables and interior laying.


Inside or outside

The Frost guard Cable is PVC-free and is suitable for drinking-water pipes. Use the supplementary kit for interior laying.

Effective

When installed internally Frost Guard can provide frost protection for a 32 mm uninsulated plastic pipe down to -30°C. If there is a larger power requirement the pipe can be insulated. Frost Guard is available in ten set lengths from 2-25 m. The cable is also sold by the metre.

ART. NO.	ARTICLE	LENGTH	POWER	RSK NO.
E 89 604 22	Frost Guard	2 m	20 W	240 48 60
E 89 604 24	Frost Guard	4 m	40 W	240 48 61
E 89 604 26	Frost Guard	6 m	60 W	240 48 62
E 89 604 28	Frost Guard	8 m	80 W	240 48 63
E 89 604 30	Frost Guard	10 m	100 W	240 48 64
E 89 604 33	Frost Guard	13 m	130 W	240 48 65
E 89 604 36	Frost Guard	16 m	160 W	240 48 66
E 89 604 39	Frost Guard	19 m	190 W	240 48 67
E 89 604 42	Frost Guard	22 m	220 W	240 48 68
E 89 604 45	Frost Guard	25 m	250 W	240 48 69
E 89 604 10	Supplementary kit for interior laying			



Internal and external installation of insulated pipes.